



ASSOCIATION CONNECTING  
ELECTRONICS INDUSTRIES®



**IPC/WHMA-A-620**

# **Requirements and Acceptance for Cable and Wire Harness Assemblies**

Developed by the IPC Task Group (7-31f) of the Product Assurance Subcommittee (7-30) and the WHMA Industry Technical Guidelines Committee (ITGC)



Users of this standard are encouraged to participate in the development of future revisions.

Contact:

IPC  
2215 Sanders Road  
Northbrook, Illinois  
60062-6135  
Tel 847 509.9700  
Fax 847 509.9798

Wiring Harness Manufacturers Assoc.  
3335 N. Arlington Heights Road, Suite E  
Arlington Heights, Illinois  
60004  
Tel 847 577.7200  
Fax 847 577.7276

# Table of Contents

<b>1 Requirements and Acceptance for Cable and Wire Harness Assemblies</b> .....	1-1	<b>2 Applicable Documents</b> .....	2-1
1.1 Scope .....	1-1	2.1 IPC .....	2-1
1.2 Purpose .....	1-1	2.2 Joint Industry Standards (ANSI J-STD) .....	2-1
1.3 Approach To This Document .....	1-1	2.3 Department of Defense (Military) .....	2-2
1.4 Specialized Designs .....	1-1	2.4 American National Standards Institute (ANSI) .....	2-2
1.5 Terms and Definitions .....	1-1	2.5 ESD Associations (ESDA) .....	2-2
1.6 Classes of Products .....	1-1	<b>3 Preparation</b> .....	3-1
1.7 Document Hierarchy .....	1-2	3.1 Strand Damage .....	3-2
1.8 Tool and Equipment Control .....	1-2	3.2 Conductor - Deformation .....	3-3
1.9 Observable Criteria .....	1-2	3.3 Wire Separation (Birdcaging) .....	3-3
1.10 Defects and Process Indicators .....	1-3	3.4 Damaged Insulation .....	3-5
1.11 Inspection Conditions .....	1-3	<b>4 Soldered Terminations</b> .....	4-1
1.11.1 Target .....	1-3	4.1 Wire Preparation, Tinning .....	4-2
1.11.2 Acceptable .....	1-3	4.2 Parts Preparation, Gold Removal .....	4-3
1.11.3 Process Indicator .....	1-3	4.3 Cleanliness .....	4-4
1.11.4 Defect .....	1-3	4.3.1 Prior to Soldering .....	4-4
1.11.5 Disposition .....	1-3	4.3.2 Solder Connections .....	4-4
1.11.6 Product Classification Implied Relationships .....	1-4	4.3.3 Particulate Matter .....	4-4
1.11.7 Conditions Not Specified .....	1-4	4.3.4 Flux Residue .....	4-5
1.12 Electrical Clearance .....	1-4	4.4 Insulation .....	4-6
1.13 Measurement Units and Applications .....	1-4	4.4.1 Clearance .....	4-6
1.14 Verification of Dimensions .....	1-5	4.4.2 Damage from Soldering .....	4-7
1.15 Visual Inspection .....	1-5	4.5 Flexible Sleeve Insulation .....	4-9
1.15.1 Lighting .....	1-5	4.6 Birdcaged Wire (Soldered) .....	4-11
1.15.2 Magnification .....	1-5		
1.16 Electrostatic Discharge (ESD) Protection .....	1-5		
1.17 Workmanship/Handling .....	1-5		
1.18 Cleaning .....	1-5		

## Table of Contents (cont.)

<b>4.7 Connection Requirements</b> .....	4-12	<b>6.2 Discrete Wire Termination</b> .....	6-9
4.7.1 Terminals .....	4-12	6.2.1 General .....	6-9
4.7.2 Turret Terminals .....	4-12	6.2.2 Position of Wire .....	6-10
4.7.3 Bifurcated Terminals .....	4-14	6.2.3 Overhang (Extension) .....	6-11
4.7.3.1 Side Route Attachments .....	4-14	6.2.4 Wire Holder .....	6-13
4.7.3.2 Bottom and Top Route Attachments .....	4-16	6.2.5 Damage in Connection Area .....	6-15
4.7.3.3 Staked Wires .....	4-17	6.2.6 End Connectors .....	6-16
4.7.4 Slotted Terminals .....	4-18	6.2.7 Wiremount Connectors .....	6-18
4.7.5 Pierced/Perforated/Punched Terminals .....	4-19	6.2.8 Subminiature D-Connector (Series Bus Connector) .....	6-19
4.7.6 Hook Terminals .....	4-20	6.2.9 Modular Connectors (RJ Type) .....	6-21
4.7.7 Cup Terminals .....	4-21	<b>7 Ultrasonic Welding</b> .....	7-1
4.7.8 Series Connected Terminals .....	4-22	<b>7.1 Insulation Clearance</b> .....	7-2
<b>4.8 Solder Requirements</b> .....	4-23	<b>7.2 Weld Nugget</b> .....	7-3
4.8.1 General .....	4-24	7.2.1 Geometry .....	7-3
4.8.2 Fillet .....	4-25	<b>8 Splices</b> .....	8-1
4.8.3 Turret Terminals .....	4-27	<b>8.1 Soldered Splices</b> .....	8-2
4.8.4 Bifurcated Terminals .....	4-28	8.1.1 Mesh .....	8-2
4.8.5 Slotted Terminals .....	4-29	8.1.2 Wrap .....	8-3
4.8.6 Pierced/Perforated Terminals .....	4-30	8.1.3 Hook .....	8-4
4.8.7 Hook Terminals .....	4-31	8.1.4 Lap .....	8-5
4.8.8 Cup Terminals .....	4-32	<b>8.2 Splices - Crimped</b> .....	8-6
<b>5 Crimp Terminations</b> .....	5-1	8.2.1 Barrel .....	8-6
<b>5.1 Stamped and Formed Contacts</b> .....	5-2	8.2.2 Double Sided .....	8-8
5.1.1 Insulation Support Crimp .....	5-3	<b>8.3 Splices - Ultrasonic Welded</b> .....	8-11
5.1.2 Insulation Inspection Window .....	5-6	<b>9 Connectorization</b> .....	9-1
5.1.3 Conductor Crimp .....	5-7	<b>9.1 Hardware Mounting</b> .....	9-2
5.1.4 Crimp Bellmouth .....	5-10	9.1.1 Jackscrews .....	9-2
5.1.5 Conductor Brush .....	5-11	<b>9.2 Strain Relief</b> .....	9-3
5.1.6 Carrier Cutoff Tab .....	5-14	9.2.1 Sleeving .....	9-3
<b>5.2 Machined Crimp Contacts</b> .....	5-15	<b>9.3 Sleeving and Boots</b> .....	9-4
5.2.1 Insulation Clearance .....	5-15	9.3.1 Position .....	9-4
5.2.2 Insulation Support (Insulation Support Style Contacts) .....	5-17	9.3.2 Bonding - Conductive Adhesive .....	9-5
5.2.3 Conductor Location .....	5-18	<b>9.4 Connector Damage</b> .....	9-7
5.2.4 Crimping .....	5-20	9.4.1 Criteria .....	9-7
5.2.5 Under Size Conductor - CMA Buildup Crimps .....	5-22	9.4.2 Limits - Hard Face - Mating Surface .....	9-8
<b>6 Insulation Displacement Connection (IDC)</b> .....	6-1	9.4.3 Limits - Soft Face - Mating Surface or Rear Seal Area .....	9-9
<b>6.1 Mass Termination, Flat Cable</b> .....	6-2	9.4.4 Contacts .....	9-10
6.1.1 End Cutting .....	6-2		
6.1.2 Notching .....	6-3		
6.1.3 Planar Ground Plane Removal .....	6-4		
6.1.4 Connector Position .....	6-5		
6.1.5 Connector Skew and Lateral Position .....	6-7		
6.1.6 Retention .....	6-8		

## Table of Contents (cont.)

<b>10 Molding/Potting</b> .....	10-1	<b>13.2 Center Conductor Termination</b> .....	13-4
<b>10.1 Molding</b> .....	10-2	13.2.1 Crimp .....	13-4
10.1.1 Insulation Damage .....	10-2	13.2.2 Solder .....	13-6
10.1.2 Filling .....	10-3	<b>13.3 Solder Ferrule Pins</b> .....	13-8
10.1.3 Terminal Positioning .....	10-5	13.3.1 General .....	13-8
10.1.4 Fit to Wire or Cable .....	10-6	13.3.2 Insulation .....	13-10
10.1.5 Flashing .....	10-8	<b>13.4 Coaxial Connector - Printed Wire Board Mount</b> .....	13-11
10.1.6 Chill Marks (Knit Lines), Stress Lines or Cracks .....	10-9	<b>13.5 Coaxial Connector - Center Conductor Length - Right Angle Connector</b> .....	13-12
10.1.7 Compound Color .....	10-9	<b>13.6 Terminal Cover - Soldering</b> .....	13-14
<b>10.2 Potting</b> .....	10-10	<b>13.7 Shield Termination</b> .....	13-16
10.2.1 Filling .....	10-10	13.7.1 Clamped Ground Rings .....	13-16
10.2.2 Fit to Wire or Cable .....	10-11	13.7.2 Crimped Ferrule .....	13-17
10.2.3 Curing .....	10-12	<b>13.8 Center Pin Position</b> .....	13-19
<b>11 Cable Assemblies and Wires</b> .....	11-1	<b>13.9 Semirigid Coax</b> .....	13-20
<b>11.1 Cable Assemblies</b> .....	11-2	13.9.1 Bending and Deformation .....	13-20
11.1.1 Reference Surfaces .....	11-2	13.9.2 Surface Condition .....	13-23
11.1.1.1 Straight/Axial Connectors .....	11-2	13.9.3 Dielectric Cutoff .....	13-24
11.1.1.2 Right-Angle Connectors .....	11-2	13.9.4 Dielectric Cleanliness .....	13-27
11.1.2 Length Measurement .....	11-3	13.9.5 Solder .....	13-28
<b>11.2 Wires (As an Assembly)</b> .....	11-4	<b>13.10 Swage-Type Connector</b> .....	13-30
11.2.1 Electrical Terminal Reference Location .....	11-4	<b>13.11 Soldering and Stripping of Biaxial or Twinaxial Wire - Low Temperature Insulation</b> .....	13-31
11.2.2 Length Measurement .....	11-5	13.11.1 Jacket and Tip Installation .....	13-31
<b>12 Marking/Labeling</b> .....	12-1	13.11.2 Ring Installation .....	13-33
<b>12.1 Content</b> .....	12-2	<b>14 Wire Bundle Securing</b> .....	14-1
<b>12.2 Legibility</b> .....	12-2	<b>14.1 Tie Wrap/Lacing Application</b> .....	14-2
<b>12.3 Permanency</b> .....	12-4	14.1.1 Tightness .....	14-6
<b>12.4 Location</b> .....	12-4	14.1.2 Damage .....	14-7
<b>12.5 Functionality</b> .....	12-5	14.1.3 Spacing .....	14-8
<b>12.6 Marker Sleeve</b> .....	12-6	<b>14.2 Breakouts</b> .....	14-9
12.6.1 Wrap Around .....	12-6	14.2.1 Individual Wires .....	14-9
12.6.2 Tubular .....	12-8	14.2.2 Spacing .....	14-10
<b>13 Coaxial and Twinaxial Cable Assemblies</b> .....	13-1		
<b>13.1 Stripping</b> .....	13-2		

## Table of Contents (cont.)

<b>14.3 Wire Bundles</b> .....	14-13	<b>17 Installation</b> .....	17-1
14.3.1 Wire Crossover .....	14-13	<b>17.1 General</b> .....	17-2
14.3.2 Coaxial Cable Routing .....	14-14	<b>17.2 Hardware Installation</b> .....	17-3
14.3.3 Unused Wire Termination .....	14-15	17.2.1 Sequence .....	17-4
14.3.4 Ties over Splices and Ferrules .....	14-16	17.2.2 Type and Missing .....	17-6
<b>15 Shielding</b> .....	15-1	17.2.3 Minimum Torque for Electrical Connections .....	17-7
<b>15.1 Braided</b> .....	15-2	17.2.4 Wires .....	17-8
15.1.1 Direct Applied .....	15-3	17.2.5 High Voltage Applications .....	17-11
15.1.2 Pre-Woven .....	15-4	<b>17.3 Wire/Harness Installation</b> .....	17-12
<b>15.2 Shield Termination</b> .....	15-5	17.3.1 Stress Relief .....	17-12
15.2.1 Pick Off .....	15-5	17.3.2 Wire Dress .....	17-13
15.2.2 No Pick Off .....	15-11	17.3.3 Service Loops .....	17-14
15.2.3 Low Temperature Insulated Wire - With Pick Off .....	15-13	<b>18 Solderless Wrap</b> .....	18-1
<b>15.3 Shield Termination - Shrink and Crimp</b> .....	15-15	<b>18.1 Number of Turns</b> .....	18-2
<b>15.4 Shield Termination - Splicing</b> .....	15-19	<b>18.2 Turn Spacing</b> .....	18-3
<b>15.5 Tapes - Barrier and Conductive, Adhesive or Non-Adhesive</b> .....	15-21	<b>18.3 End Tails, Insulation Wrap</b> .....	18-4
<b>15.6 Conduit (Shielding)</b> .....	12-22	<b>18.4 Raised Turns Overlap</b> .....	18-6
<b>15.7 Conductive Coating</b> .....	15-23	<b>18.5 Connection Position</b> .....	18-7
<b>15.8 Shrink Tubing - Conductive Lined</b> .....	15-24	<b>18.6 Wire Dress</b> .....	18-9
<b>16 Cable/Wire Harness Protective Coverings</b> .....	16-1	<b>18.7 Wire Slack</b> .....	18-10
<b>16.1 Braid</b> .....	16-2	<b>18.8 Plating</b> .....	18-11
16.1.1 Direct Applied .....	16-2	<b>18.9 Damage</b> .....	18-12
16.1.2 Pre-Woven .....	16-4	18.9.1 Insulation .....	18-12
<b>16.2 Taping</b> .....	16-5	18.9.2 Wires and Terminals .....	18-13
<b>16.3 Sleeving</b> .....	16-6	<b>Appendix A</b> .....	A-1
16.3.1 Shrink Tubing .....	16-6	<b>Appendix B</b> .....	B-1
<b>16.4 Spiral Plastic Wrap (Spiral Wrap Sleeving)</b> .....	16-7	<b>Standard Improvement Form</b>	
<b>16.5 Conduit (Containment)</b> .....	16-8		

## Foreword

### 1.1 Scope

This standard is a collection of visual Quality Acceptability Requirements for Cable, Wire and Harness Assemblies. It was prepared by the ITGC Industry Technical Guidelines Committee of the Wire Harness Manufacturers Association and the Product Assurance Committee of IPC - Association Connecting Electronic Industries. IPC/WHMA-A-620 can be used as a stand-alone document for purchasing products, however it does not specify frequency of in-process inspection or frequency of end product inspection. No limit is placed on the number of process indicators or the number of allowable repair/rework of defects. Such information should be developed with a statistical process control plan (see IPC-9191).

### 1.2 Purpose

This publication describes acceptability criteria for producing crimped, mechanically secured, or soldered interconnections and the associated lacing/restraining criteria associated with cable and harness assemblies. It is not the intent of this document to exclude any acceptable procedure used to make the electrical connection; however, the methods used must produce completed assemblies that conform to the acceptability requirements described in this document.

### 1.3 Approach To This Document

The illustrations in this document portray specific points noted in the title of each section. A brief description follows each illustration. The development committee recognizes that different parts of the industry have different definitions for some terms used herein. For the purposes of this document, the terms cable and wire harness are used interchangeably.

### 1.4 Specialized Designs

IPC/WHMA-A-620, as an industry consensus document, cannot address all of the possible product design combinations. However, the standard does provide criteria for commonly used technologies. Where uncommon or specialized technologies are used, it may be necessary to develop unique acceptance criteria. The development of unique criteria should include customer involvement or consent and the criteria developed should include an agreed upon definition for acceptance of each characteristic.

Whenever possible, new criteria, or criteria on specialized products should be submitted, using the Standard Improvement Form included in this standard, to the IPC Technical Committee to be considered for inclusion in upcoming revisions of this standard.

### 1.5 Terms and Definitions

Terms are consistent with the definitions provided by IPC-T-50. For the understanding of this document, selected definitions are listed below and in Appendix A.

**Shall or Must** – Mean that the requirement or attribute discussed is mandatory for all Product Classes.

**Should** – Reflects recommendations and is used to reflect general industry practices and procedures for guidance only.

**Wire Diameter** – In this document, wire diameter (D) is the overall diameter of conductor plus insulation.

### 1.6 Classes of Products

The customer has the ultimate responsibility for identifying the class to which the assembly is evaluated. Thus, accept and/or reject decisions must be based on applicable documentation such as contracts, drawings, specifications, standards and reference documents. Criteria defined in this standard reflect three Product Classes, which are as follows:

#### Class 1 – General Electronic Products

Includes products suitable for applications where the major requirement is the function of the completed assembly.

#### Class 2 – Dedicated Service Electronic Products

Includes products where continued performance and extended life is required, and for which uninterrupted service is desired but not critical. Typically, the end-use environment would not cause failures.

#### Class 3 – High Performance Electronic Products

Includes products where continued performance or performance-on-demand is critical, equipment downtime cannot be tolerated, end-use environment may be uncommonly harsh, and the equipment must function when required, such as life support systems and other critical systems.



### 5.1.1 Stamped and Formed Contacts – Insulation Support Crimp

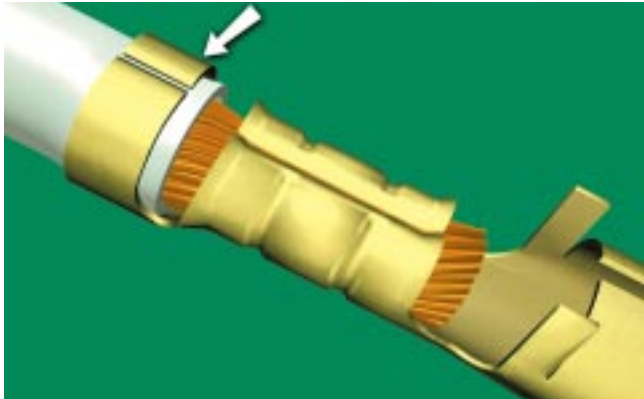


Figure 5-3



Figure 5-4



Figure 5-5

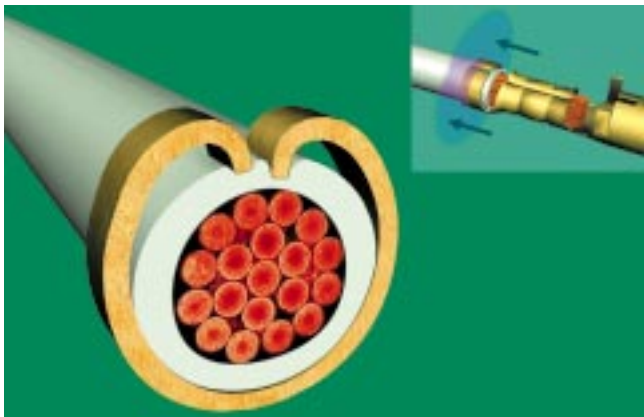


Figure 5-6

#### Target - Class 1,2,3

- Insulation fully enters and extends past the insulation crimp tabs.
- If multiple wires are used insulation from all wires extend past the insulation crimp tabs.
- Insulation crimp does not cut or break insulation.
- Insulation crimp tabs fully wrap and support insulation.
- For insulated lugs, the insulation crimp is evenly formed and contacts the wire insulation providing support without damaging the insulation (Figure 5-5).

#### Acceptable - Class 1

#### Process Indicator - Class 2

#### Defect - Class 3

- Puncturing of the insulation surface by the insulation crimp tabs, provided that the tabs do not penetrate down to the conductor.

**5.1.1 Stamped and Formed Contacts –  
Insulation Support Crimp (cont.)**

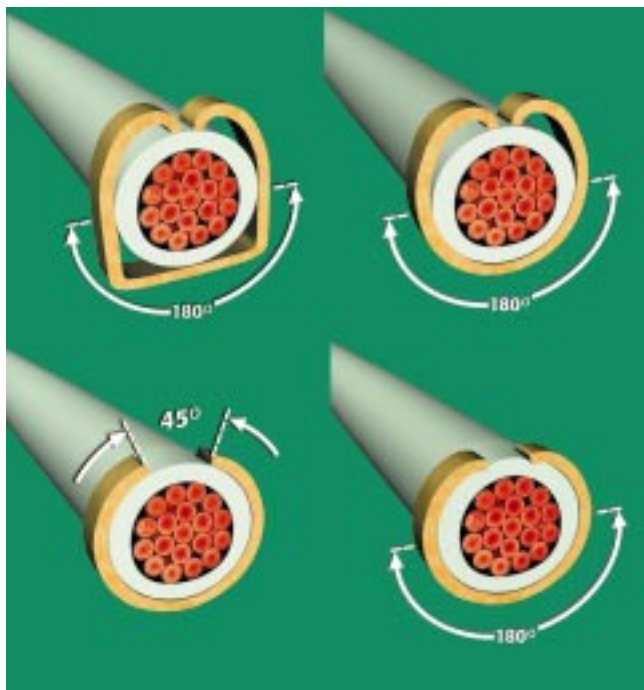


Figure 5-7

**Acceptable - Class 2,3**

- Minor deformation of the insulation surface as long as the insulation crimp tabs do not cut, break, penetrate or puncture the surface of the wire insulation.
- Insulation crimp tabs provide a minimum side support of 180° to the wire insulation and both tabs contact the top of the wire insulation.
- Insulation rimp tabs do not meet at the top, but encircle the wire leaving an opening of 45° or less at the top.
- The outer insulation sleeve on insulated terminals **shall** remain secured to the terminal after crimping.



Figure 5-8

**Acceptable - Class 1**

**Process Indicator - Class 2,3**

- For insulated terminals, irregular shaped insulation crimp contacts the wire insulation providing support without damaging the insulation (Figures 5-8 and 5-9).



Figure 5-9

### 5.2.4 Machined Crimp Contacts - Crimping (cont.)

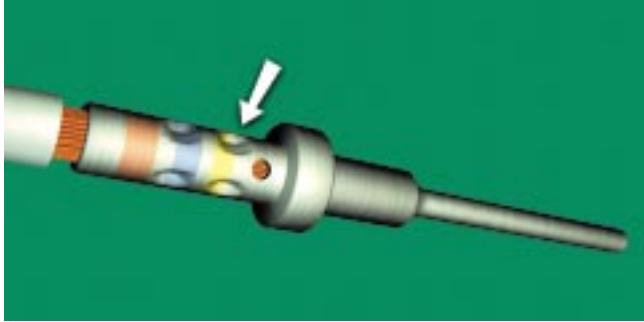


Figure 5-64

**Acceptable - Class 2,3**

- The crimp is not centered and the inspection window is not deformed.
- The wire entry end of the barrel is not deformed by the crimp.

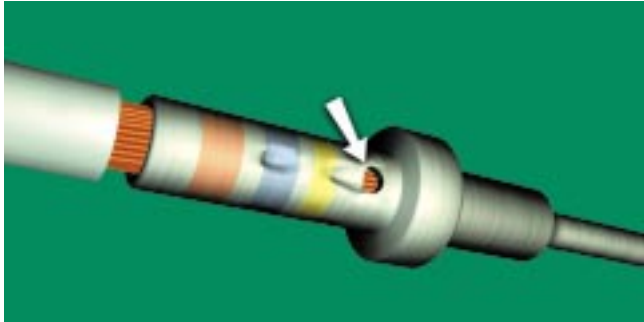


Figure 5-65

**Defect - Class 2,3**

- The crimp touches the top edge of the inspection window.
- Contact has exposed base metal.

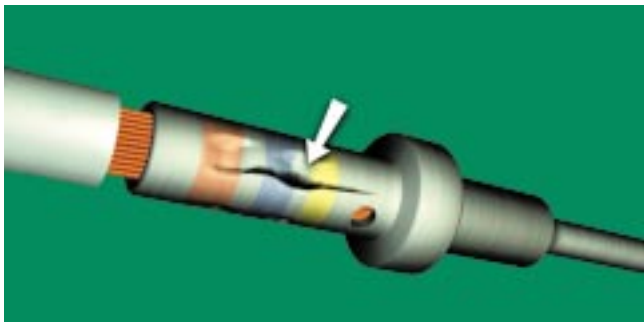


Figure 5-66

**Defect - Class 1,2,3**

- Wire is not secured by crimp.
- Contact has visible fracture or cracks.
- Double crimping of electrical terminations or connector contacts unless otherwise specified.
- Contact barrel is deformed or bent.

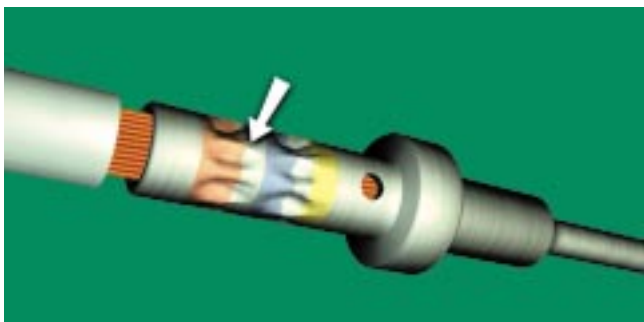


Figure 5-67

**6.1.5 Mass Termination, Flat Cable – Connector Skew and Lateral Position**

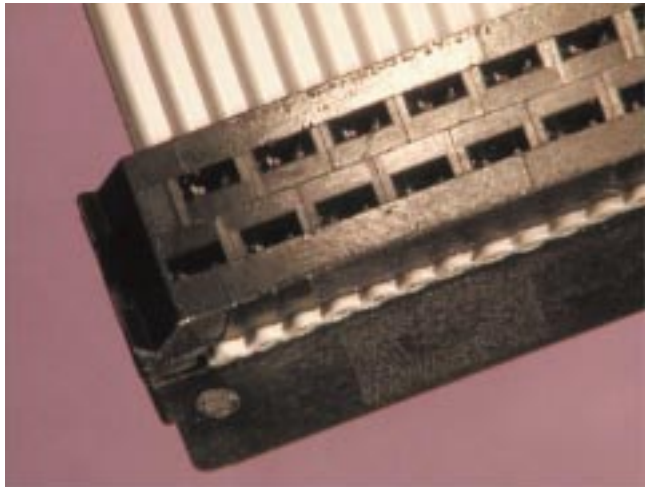


Figure 6-12

**Target - Class 1,2,3**

- Connector is aligned perpendicular to the edge of the flat cable.
- Cable end is flush along the entire length of the outside edge of the connector.
- All conductors are centered within the v-notch of the connector contacts.

**Acceptable - Class 1,2,3**

- Connector is aligned so that all conductors are centered in their respective v-notches of the cable.



Figure 6-13

**Defect - Class 1,2,3**

- Connector misalignment precludes contact of all wires to the IDC contacts.
- Connector misalignment permits shorting of conductors in the IDC contact area.
- Connector misalignment precludes assembly of connector cover.
- Connector misalignment causes wire damage during crimping.
- Face of the cable is not parallel to the face of the connector (Figure 6-14).



Figure 6-14

6.2.3 Discrete Wire Termination – Overhang (Extension) (cont.)

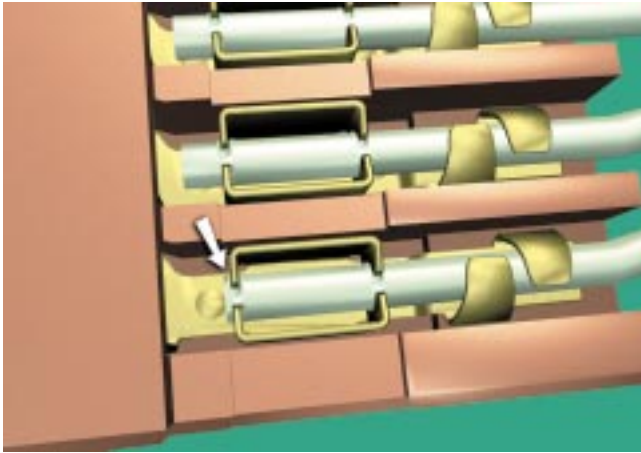


Figure 6-26

**Defect - Class 2,3**

- Overhang L of the wire is less than 50% overall wire diameter (Figure 6-26).
- Wire is deformed and extends out of the connector (Figure 6-27).

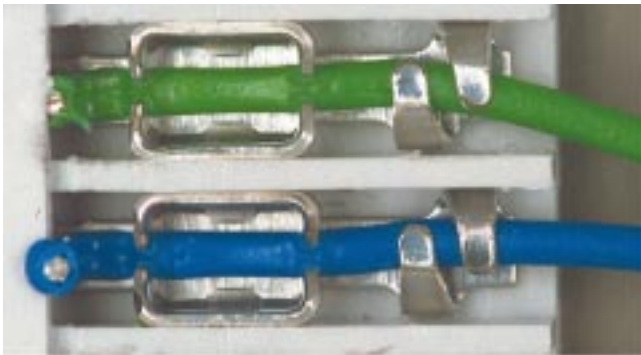


Figure 6-27

## 7.2.1 Weld Nugget – Geometry (cont.)



Figure 7-6

**Acceptable - Class 1,  
Process Indicator - Class 2,3**

- Individual wire strands are distinguishable on compression surfaces, but there are no loose strands.

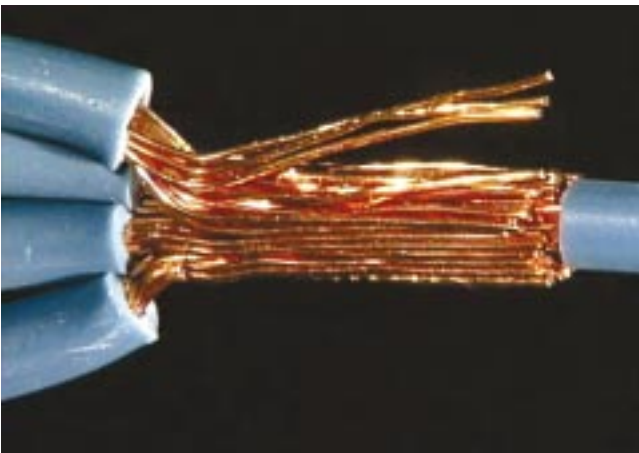


Figure 7-7

**Defect - Class 2, 3.**

- Any loose wire strands.

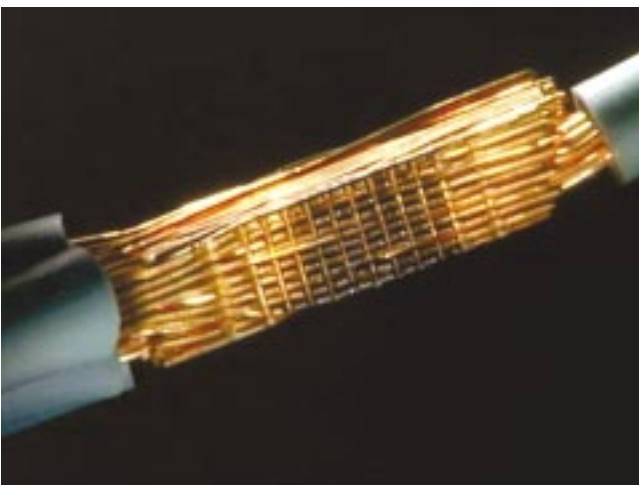


Figure 7-8

**Defect - Class 1, 2, 3**

- Any discoloration of the conductors.

### 13.2.1 Center Conductor Termination – Crimp (cont.)



Figure 13-5

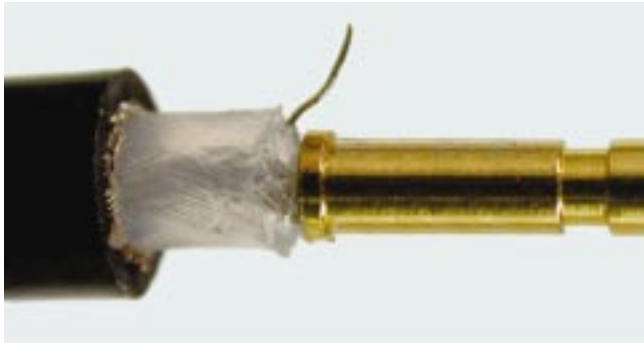


Figure 13-6



Figure 13-7



Figure 13-8

#### Defect - Class 1,2,3

- Crimp is not centered in crimp area of terminal and causes damage to terminal (Figure 13-5).
- Conductor strand(s) not captured in terminal (Figure 13-6).
- Terminal damaged by crimp (Figures 13-5, 7 and 8).
- Pin shows "dog ear" of excess material (Figure 13-7).
- Crimp loose - does not hold terminal (not shown).
- Braid strand(s) caught in terminal (not shown).

14.2.2 Breakouts – Spacing (cont.)

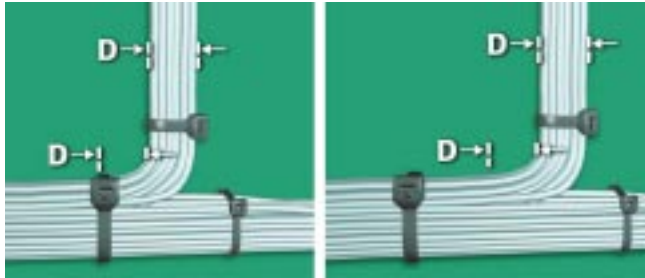


Figure 14-19



Figure 14-20

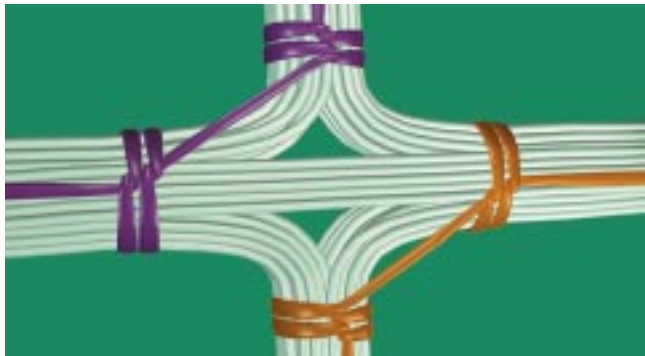


Figure 14-22

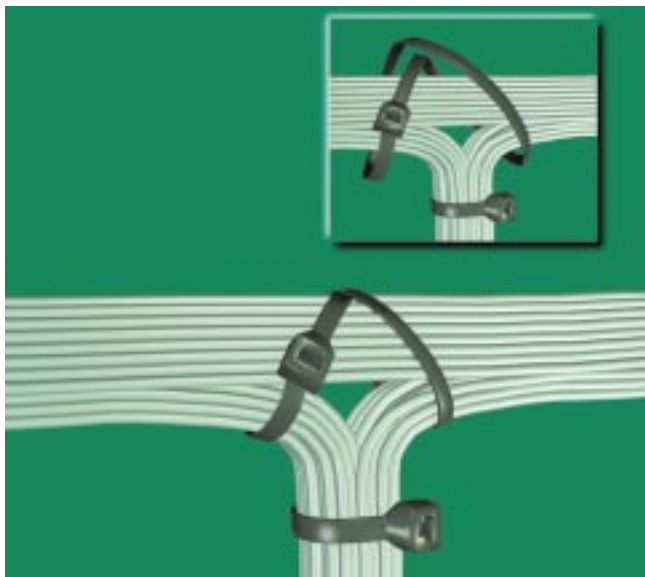


Figure 14-24

Acceptable - Class 1,2,3

- Restraining devices are placed before and after all breakouts.
- Spacing of first restraint from the breakout is three diameters of the wire bundle or 10 cm [4 in] whichever is less.

**Note:** Figures 14-19 through 14-25 provide examples of typically acceptable restraining configurations.



Figure 14-21

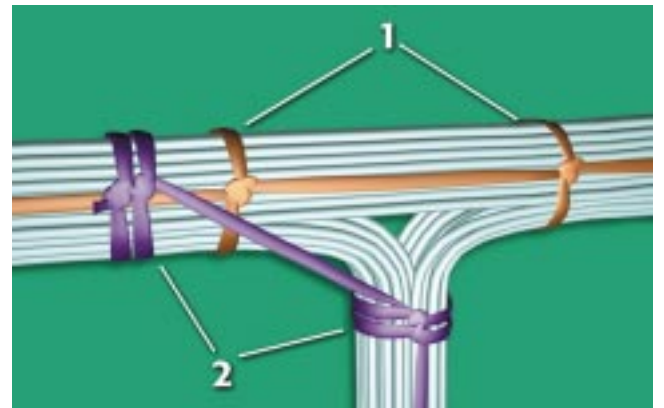


Figure 14-23  
1. Single lock stitch  
2. Double lock stitch



Figure 14-25